





订购码 Ordering Code

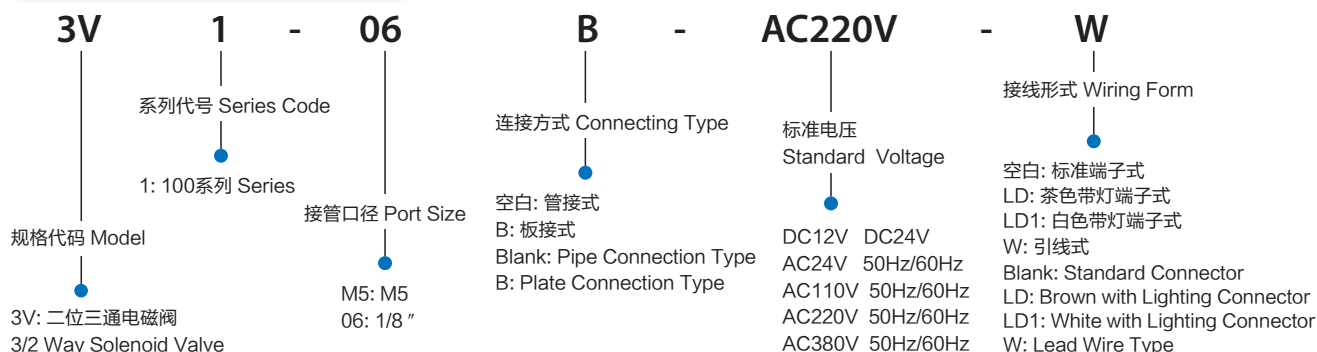


规格 Specification

型号 Model	3V1-M5	3V1-06
工作介质/Working Medium	经40微米过滤的空气 40 Micron Filtered Air	
动作方式/Motion Pattern	直动式 Direct Drive Type	
接管口径/Port Size	M5	1/8"
周围温度/Ambient Temperature	-10 ~ +60℃	
气体温度/Gas Temperature	5 ~ 60℃	
出风口直径/Air Outlet Diameter	1.0mm	
润滑/Lubrication	不需要 Not Necessary	
使用压力/Working-pressure	0 ~ 0.8MPa	
最大耐压力/Max. Pressure Resistance	1.2MPa	
耗电量/Power Consumption	AC: 5.5VA DC: 4.8W	
保护等级/Protect Class	IP65	
接电形式/Power Connection Form	出线式或端子式 Lead Wire or Connector Type	
本体材质/Material of Body	铝合金 Aluminum Alloy	
最高动作频率/Highest Action Frequency	每秒十次 10 Cycle/Sec	
绝缘性/Insulation	F级 / F Class	
电压范围/Voltage Range	± 10%	
最短励磁时间/Shortest Excitation Time	0.05秒 Second	


外形尺寸 Overall Dimension

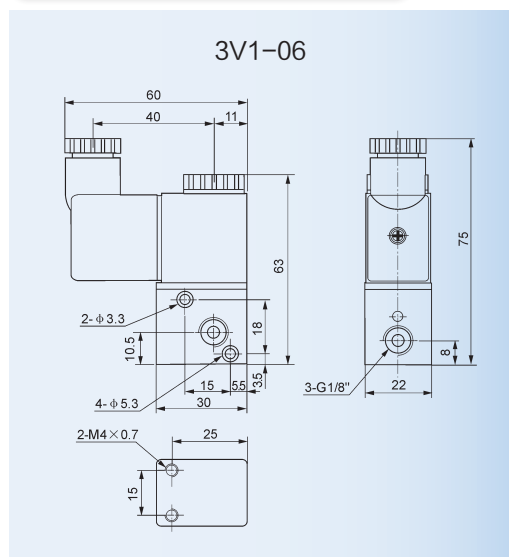

3V1-06-3F



3V1-06B



3V1-06B-3F

