



- ▶ 本产品为全不锈钢产品（不锈钢包含阀体，阀杆，手动按钮，先导头，先导座，螺丝）
- ▶ 适用于单 / 双作用执行机构
- ▶ 自由交叉式切换
- ▶ 带不锈钢手动开关装置
- ▶ 适用于恶劣的环境中
- ▶ 适用于低温，高温和抗腐蚀，适用酸碱及腐蚀介质。
- ▶ 密封材质为 HNBR / VITON / 低温橡胶
- ▶ 可配合防爆线圈使用（国内防爆认证，ATEX，SIL）
- ▶ Complete Stainless steel material (Main body, Spool, Armature tube, Manual override, Stainless steel screws and armature seat)
- ▶ For Singel and double operated actuators
- ▶ Manual override with and Without detent
- ▶ Compact design with large flow rate
- ▶ Suitable for Critical environment. Low and high temperature. Dirty and pollution condition
- ▶ Corrosion resistant. High temperature resistance.
- ▶ Seal material : HNBR / VITON / IOW TEMPERATURE SEAL
- ▶ All valves available with ex protected coils (ATEX and SIL and CE and ISO certificate)

DSV 系列订购码 / DSM Series ordering

DSV 5 3 1 - 08 E Ex

系列 / Series

DSV 不锈钢电磁阀 / Stainless steel solenoid valve

阀位数 / Number of positions

5 二位五通 / Two-position Five-way
3 二位三通 / Two-position Three-way

阀体尺寸 / Body size

2 2 系列阀体 / 2 Series valve body
3 3 系列阀体 / 3 Series valve body
5 5 系列阀体 / 5 Series valve body

线圈及位数 / Coil and places

1 单电控 / Single-head
2 双电控 / Double-head

接口 / Joint pipe bore

06 1/8
08 1/4
10 3/8
15 1/2

线圈 / Solenoid coil

空白 / Blank IP65(带接线盒 / With connector)
Ex 防爆线圈 / Ex protected coils

工作温度 / Operating temperature

空白 / Blank -20~80℃
C1 -40~60℃

电磁铁电压 / Solenoid voltage

A 220V AC
C 110V AC
E 24V DC
F 12V DC


配管口螺牙 / Thread

空白 / Blank G
N NPT
R RC

型号 /Model	介质 Medium	公称通径 Orifice size(mm)	接管螺纹 Port connection(G)	工作压力 Operating pressure	工作温度 Operating temperature	介质温度 Medium temperature	流量 Flow(L/min)	换向时间 Switching time	不带线圈重量 Weight without solenoid(kg)
DSV521-08	气体 Air,Gas	5	1/4	0.2 ~ 0.8(MPa)	-20℃ ~ 180℃	-10℃ ~ 120℃	1200	35(ms)	0.35
DSV522-08		8							0.30
DSV531-08		12							0.66
DSV532-08		5							1200
DSV551-15		8	1/2				2400		1.12
DSV552-15		12							1.05
DSV331-08		8	1/4				1700		
DSV351-15		8	1/2				2400		

▶ 别的电压可另行订制 / Several standard voltage grades are optional.

DSV521-08

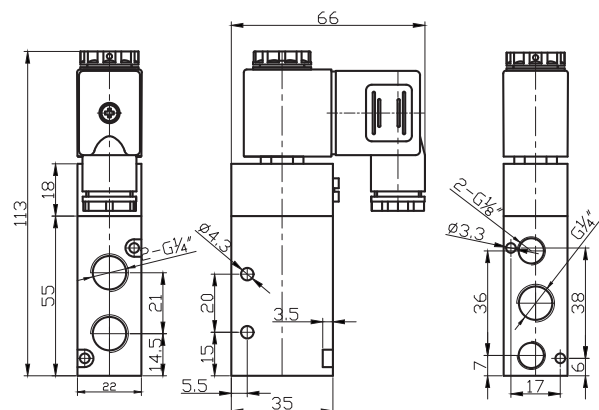

DSV522-08

