


- ▶ 本产品为全不锈钢产品。配上 M5*27 不锈钢螺丝
- ▶ 依据 NAMUR 国际标准，适用于双作用执行机构
- ▶ 自由交叉式切换
- ▶ 适用于恶劣的环境中
- ▶ 适用于高温和抗腐蚀，适用酸碱及腐蚀性介质。
- ▶ 密封材质为氟橡胶
- ▶ Complete Stainless steel material. supplied 2pcs M5*27 screws
- ▶ NAMUR Standard, For double operated actuators
- ▶ Compact design with large flow rate
- ▶ Suitable for Critical environment. Low and high temperature. Dirty and pollution condition
- ▶ Corrosion resistant. High temperature resistance.
- ▶ Seal material : VITON

DSAM 系列订购码 / DSAM Series ordering

SSAM 系列 / SSAM Series		DSAM	5	3	1	-	08		
DSAM 不锈钢 NAMUR 气控阀 NAMUR Stainless steel air pilot valve									
N									
N 3/2 和 5/2 可变换 / 3/2 and 5/2 alteradle volatile variadle									
阀位数 / Number of positions									
5 二位五通 / Two-position Five-way									
3 二位三通 / Two-position Three-way									
阀体尺寸 / Body size									
2 2 系列阀体 / 2 Series valve body									
3 3 系列阀体 / 3 Series valve body									
5 5 系列阀体 / 5 Series valve body									
线圈及位数 / Coil and places									
1 单气控 / Single-head									
2 双气控 / Double-head									
工作温度 / Operating temperature									
空白 / Blank -20~80℃									
C1 -40~60℃									
配管口螺牙 / Thread									
空白 / Blank G									
N NPT									
R RC									
接口 / Joint pipe bore									
06 1/8									
08 1/4									
10 3/8									
15 1/2									

型号 /Model	介质 Medium	公称通径 Orifice size(mm)	接管螺纹 Port connection(G)	工作压力 Operating pressure	工作温度 Operating temperature	介质温度 Medium temperature	流量 Flow(L/min)	换向时间 Switching time	重量 Without solenoid(kg)
DSAM521-08	气体 / Air,Gas	5	1/4	0.2 ~ 1.0(MPa)	-20℃ ~ 180℃	-10℃ ~ 120℃	1200	35(ms)	0.3
DSAM521-08									0.25
DSAM531-08		8	1/2				1700		0.61
DSAM532-08									0.55
DSAM551-15		12	1/4				2400		1.07
DSAM552-15									1
DSAMN531-08		8	1/4				1700		
DSAMN532-08									

DSAM521-08

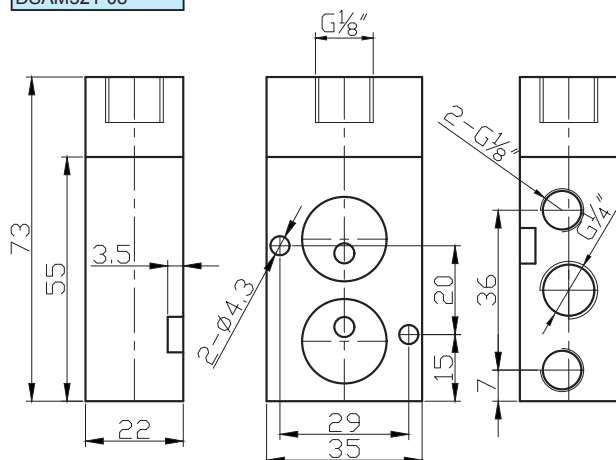

DSAM522-08

