

订购码 Ordering Code

MV

规格代码 Model

03

接管口径 Port Size

- 01: G1/8"
- 02: G1/4"
- 03: G3/8"
- 04: G1/2"
- 06: G3/4"

产品说明 Product Explain

该阀是一种二位三通手动滑阀，常接在管道中用作气源开关，当气源关闭的同时，气动系统中的气压亦即排空。


This valve is a two-position three-way hand sliding valve, which is usually installed in the piping to turn on/off airs. When it is turned off, the air pressure in the pneumatic system is exhausted simultaneously.

电磁阀
Solenoid
Valve

规格 Specification

型号 Model	MV-01	MV-02	MV-03	MV-04	MV-06
接管口径/Port Size	G1/8"	G1/4"	G3/8"	G1/2"	G3/4"
流量通径/Flow Bore	4 mm	7 mm	10 mm	12 mm	18 mm
工作介质/Working Medium	经过滤的压缩空气 Filtered Air				
工作压力/Working-pressure	0 ~ 1.0MPa				
环境温度/Ambient Temperature	5 ~ 60℃				
操作力/Working Force	20N				30N

外形尺寸 Overall Dimension

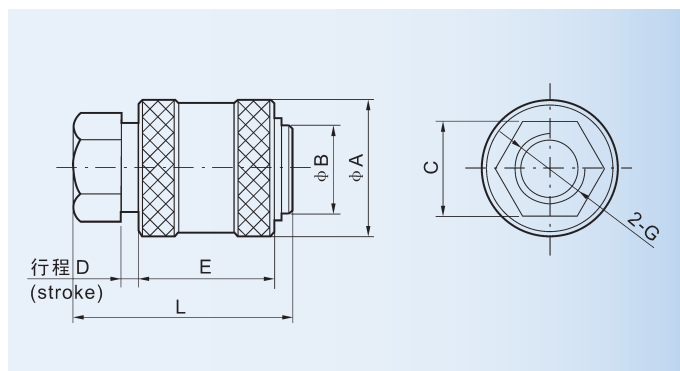

尺寸表 Dimension Sheet

型号 /符号 Model / Symbol	A	B	C	D	E	L	G
MV-01	20	13	14	3	20	32	G1/8"
MV-02	27	18	19	5	32	48	G1/4"
MV-03	30	21	22	5	32	48	G3/8"
MV-04	38	24	27	10	40	70	G1/2"
MV-06	45	32	34	10	45	75	G3/4"