


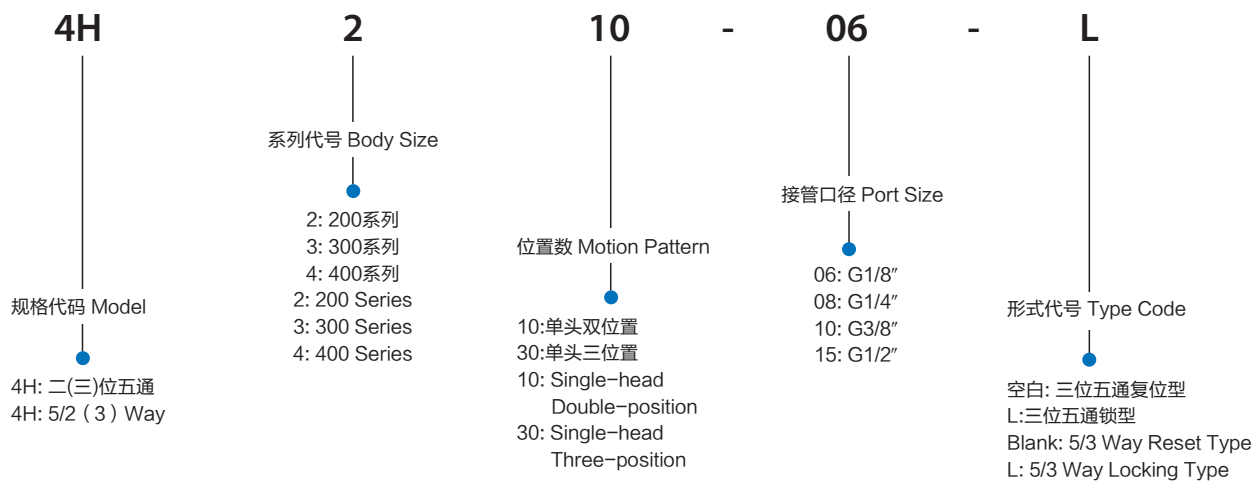


订购码 Ordering Code

电磁阀
Solenoid
Valve

规格 Specification

型号 Model	4H210-06	4H210-08	4H230-08	4H310-08	4H310-10	4H410-15
工作介质/Working Medium	经40微米过滤的空气 40 Micron Filtered Air					
动作方式/Motion Pattern	直动式 Direct Drive Type					
有效截面积/Effective Sectional Area	14mm²(CV=0.78)	16mm²(CV=0.89)	12mm²(CV=0.67)	25mm²(CV=1.4)	30mm²(CV=1.68)	50mm²(CV=2.79)
接口口径/Port Size	进气 = 出气 = 排气 = G1/8" Air Inlet=Air Outlet= Exhaust=G1/8"	进气 = 出气 = G1/4" 排气 = G1/8" Air Inlet=Air Outlet=G1/4" Exhaust=G1/8"		进气 = 出气 = 排气 = G1/4" Air Inlet= Air Outlet= Exhaust=G1/4"	进气 = 出气 = G1/8" Air Inlet=Air Outlet =G1/8"	进气 = 出气 = 排气 = G1/2" Air Inlet= Air Outlet= Exhaust=G1/2"
使用压力范围/Working-pressure Range	0~0.8MPa					
使用温度范围/Operating Temperature	0~60℃					

外形尺寸 Overall Dimension

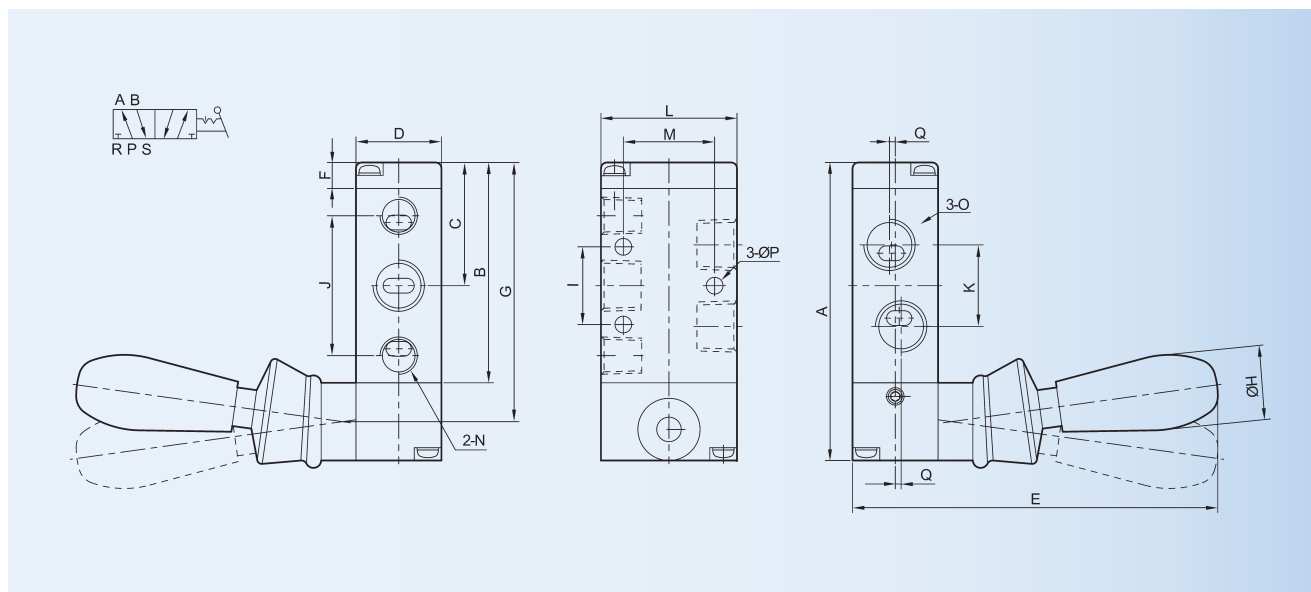

尺寸表 Dimension Sheet

符号/型号 Symbol/Model	4H210-08(06)	4H230-08(06)-S (自动复位) Automatic Reset	4H310-10(08)	4H330-10(08)-S (自动复位) (Automatic Reset)	4H410-15	4H430-15-S (自动复位) (Automatic Reset)
	4H230-08(06)-L		4H330-10(08)-L		4H430-15-L	
A	76	95	96	115	126	147
B	56.5	75.5	72	91	102	123
C	31.5	31.5	40	60	55.5	76.5
D	22	22	27	27	34	34
E	95	95	100	100	110	110
F	6.5	6.5	7.5	7.5	7.5	7.5
G	66.5	85.5	84	103	114	135
H	18	18	18	18	18	18
I	20	20	24	24	28	28
J	36	36	45	45	63	63
K	21	21	24	24	36	36
L	35	35	40	40	50	50
M	21	21	27	27	35	35
N	G1/8"	G1/8"	G3/8"	G3/8"	G1/2"	G1/2"
O	G1/4" (G1/8")	G1/4" (G1/8")	G3/8" (G1/4")	G3/8" (G1/4")	G1/2"	G1/2"
P	4.3	4.3	4.3	4.3	5.5	5.5
Q	1.5(-)	1.5(-)	2(-)	2(-)	-	-