



订购码 Ordering Code

CJ - **10** x **60** - **S** -

系列代号 Series Code 缸径 Bore 行程 Stroke 动作 Action 在头盖端的接气孔形式
The type of air hole on the head cover end

CJB: 基本型
CDJB: 内置磁环型
CJB: Normal Type
CDJB: With Magnet

6~16mm 0~200mm

S: 单动 (弹簧压回)
T: 单动 (弹簧压出)
S: Single Action (With spring return)
T: Single Action (With spring extent)


缸径 Bore (mm)	Φ6	Φ10	Φ16
记号 Mark			
无记号 Blank	-	垂直 Vertical	
R		轴向 Horizontal	

规格 Specification

内径 Bore (mm)	6		10	16
动作型式/Motion Pattern	单动:弹簧压回/弹簧压出 Double action/Single Action Extrusion type/Single Action Drawing-in Type			
工作介质/Working Medium	空气 Air			
保证耐压力/Ensured Pressure Resistance	1.05MPa (10.5kgf/cm ²)			
最高使用压力/Max. Working Pressure	0.7MPa (7.1kgf/cm ²)			
最低使用压力/Min. Working Pressure	0.25MPa (2.5kgf/cm ²)		0.15MPa (1.5kgf/cm ²)	
使用温度范围/Operating Temperature Range	-10~70℃			
使用速度范围/Operating Speed Range	50~750mm/s			
缓冲/Buffer	两端橡胶缓冲(标准) Both side rubber buffer (Standard)			
行程公差/Margin of Stroke Error	+1.0 0		mm	
接管口径/Port Size	M5×0.8			


外形尺寸 Overall Dimension

基本型 Normal Type
CJ2B6

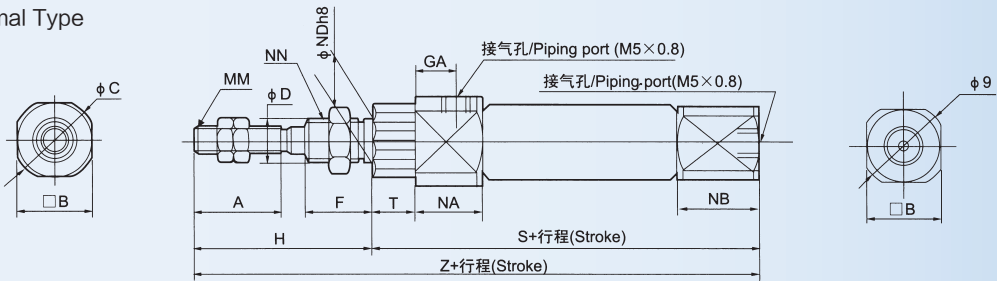

外形尺寸 Overall Dimension

基本型 Normal Type
CJB10/16

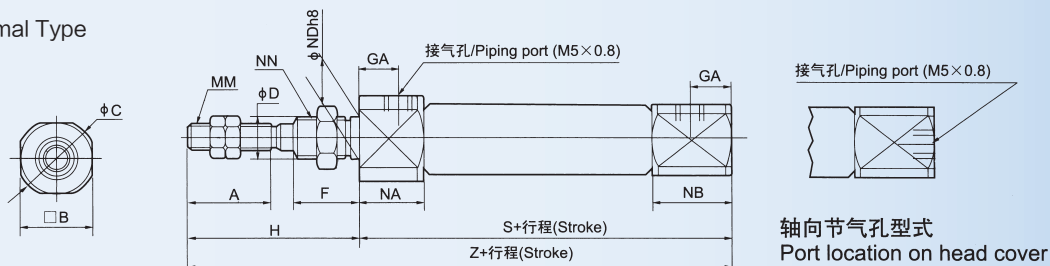


尺寸表 Dimension Sheet

缸径 Bore	A	B	C	D	F	GA	GB	H	MM	NA	NB	NDh8	NN	S	T	Z
6	15	12	14	3	8	14.5	—	28	M3×0.5	16	7	6	M6×1.0	49	3	77
10	15	12	14	4	8	8	5	28	M4×0.7	12.5	9.5	8	M8×1.0	46	—	74
16	15	18	20	5	8	8	5	28	M5×0.8	12.5	9.5	10	M10×1.0	47	—	75

外形尺寸 Overall Dimension

基本型: 弹簧压回 Normal Type: Spring return
CJB-CDJB

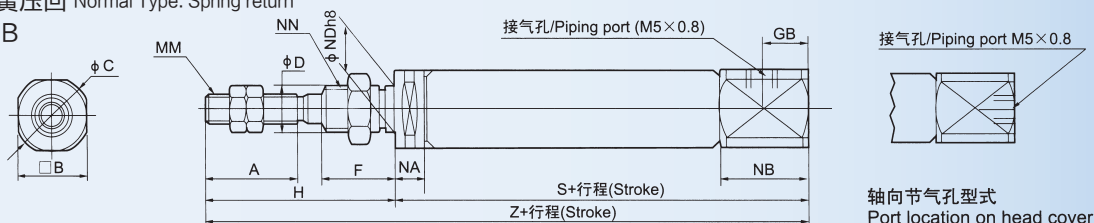


缸径 Bore	A	B	C	D	F	GB	H	MM	NA	NB	NDh8	*S								*Z							
												5-15	16-30	31-45	46-60	61-75	76-100	101-125	126-150	5-15	16-30	31-45	46-60	61-75	76-100	101-125	126-150
6	15	8	19	3	8	—	28	M3×0.5	3	7	6 ⁰ _{-0.018}	34.5 (39.5)	43.5 (48.5)	47.5 (52.5)	61.5 (66.5)	—	—	—	—	62.5 (67.5)	71.5 (76.5)	75.5 (80.5)	89.5 (94.5)	—	—	—	—
10	15	12	14	4	8	5	28	M4×0.7	5.5	9.5	8 ⁰ _{-0.022}	45.5	53	65	77	—	—	—	—	73.5	81	93	105	—	—	—	—
16	15	18	20	5	8	5	28	M5×0.8	5.5	9.5	10 ⁰ _{-0.022}	45.5	54	66	78	84	108	126	138	73.5	82	94	106	112	136	154	166


外形尺寸 Overall Dimension

基本型: 弹簧压出
Normal Type: Spring extent
CJB-CDJB

CJB6

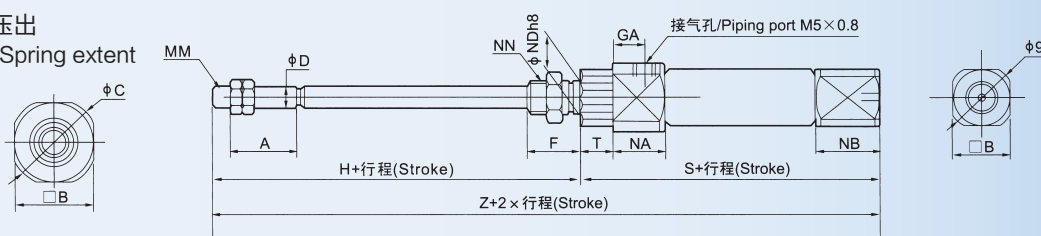

CJB10/16

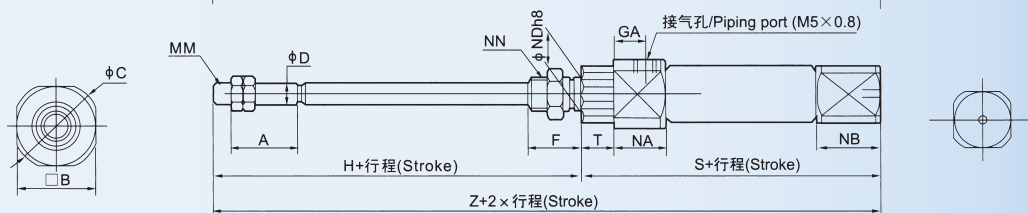

缸径 Bore	A	B	C	D	F	GA	H	MM	NN	NA	NB	NDh8	*S								*Z							
													5-15	16-30	31-45	46-60	61-75	76-100	101-125	126-150	5-15	16-30	31-45	46-60	61-75	76-100	101-125	126-150
6	15	8	14	3	8	14.5	28	M3×0.5	M6×1	16	3	6 ⁰ _{-0.018}	46.5 (51.5)	55.5 (60.5)	59.5 (60.5)	73.5 (78.5)	—	—	—	—	74.5 (79.5)	83.5 (88.5)	87.5 (92.5)	101.5 (106.5)	—	—	—	—
10	15	12	14	4	8	8	28	M4×0.7	M8×1	12.5	5.5	8 ⁰ _{-0.022}	48.5	56	68	80	—	—	—	—	76.5	83	96	108	—	—	—	—
16	15	18	20	5	8	8	28	M5×0.8	M10×1	12.5	5.5	10 ⁰ _{-0.022}	48.5	57	69	81	87	111	129	141	76.5	84	97	109	115	139	157	169