



- ▶ SUS316 不锈钢材质、耐高压、耐腐蚀、耐酸碱。
- ▶ 适用户外及有酸碱环境（不排气型）。
- ▶ 适用半导体工业。
- ▶ 有效快速排除水及微粒。
- ▶ 压力调整敏感精准。
- ▶ 不用关掉气源及不用停线加油。
- ▶ 细雾器给油供应有效保护并延长机件寿命。
- ▶ 轻量化，小型化，减少安装空间。
- ▶ 耐高压
- ▶ For high pressure use; corrosion and chemical resistance.
- ▶ Good performance for outdoor facility.
- ▶ Suitable for semi-conductor industry.
- ▶ The product effectively removes water and particle.
- ▶ Accurate and sensitive pressure setting.
- ▶ Lubricator oil can be replenished without stopping air supply.
- ▶ Oil spray in mist ensures good lubrication for machines.
- ▶ Light weight, compact size for space saving.
- ▶ High pressure resistant.


订购码 /Ordering Code

[illegible]


规格表 / Specifications

型号 / Model	DFRL-200/400/600
配管尺寸 /Port size	1/4 3/8 1/2 3/4 1"
使用流体 /Fluid	压缩空气 /Compressed air
调压结构 /Regulator construction	活塞式 /Piston
本体材质 /Body material	不锈钢 SUS316 /Stainless steel SUS316
杯子材质 /Bowl material	不锈钢 SUS316/Stainless steel SUS316
压力表材质 /Pressure gauge material	外壳不锈钢 SUS304、牙口不锈钢 SUS316、/Case:Stainless steel SUS304,/Thread:Stainless steel SUS316、
滤芯材质 /Filter element material	不锈钢 sus316/Stainless steel SUS316
过滤精度 /Filtration accuracy	5μm（标准配备）40μm（选购）/ 5μm（Standard）40μm（Option）
操作压力 /Operating pressure range	0~20kgf/cm ²
最大进气压 /Proof pressure	30kgf/cm ²
最大流量 /Max.flow rate/1/min(ANR)	1850 1/min
环境温度 /Ambient temperature	-10°C~70°C
滤杯容量 /Lubricator bowl capacity	105cc
油杯容量 /Filter bowl capacity	125cc
标准排水 /Lubricator bowl capacity	半自动（需低于 0.5kgf/cm ² 泄水）/ Semi-auto drain (Drains below 0.50.5kgf/cm ²)
净重 /Standard drain	2660g
附属配件 /Net weight	压力表（0~10kg）、塞头、固定架组 / Pressure gauge,Mounting bracket,Plug, Screw x 2
选购配件 /Accessories	压力表（0~25kg）

DFRL-200-02

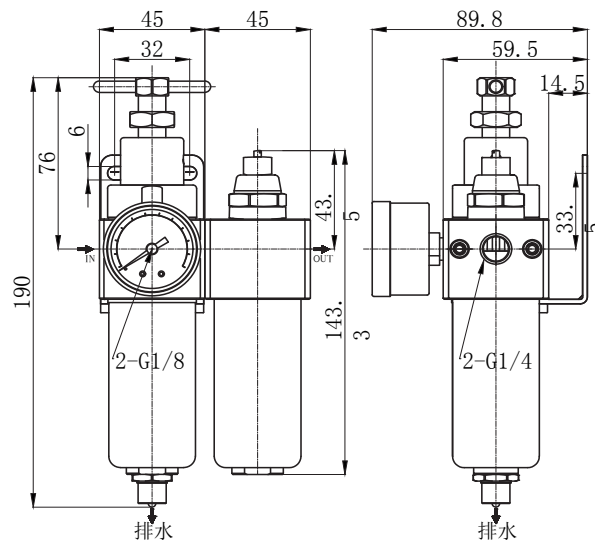

DFRL-400-04,03

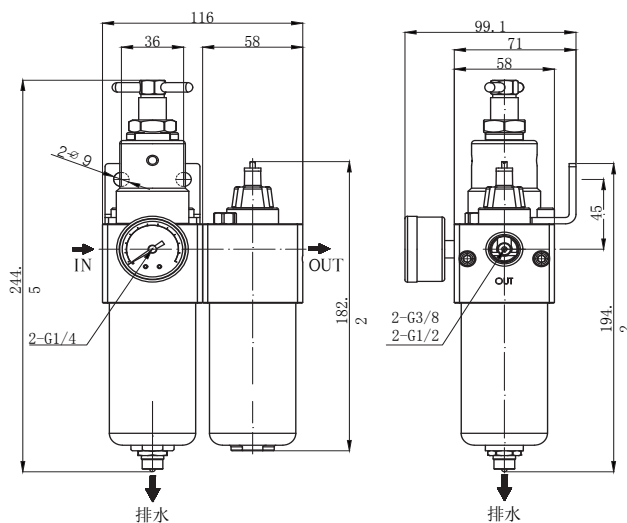

DFRL-600-10,06

