



- ▶ SUS316 不锈钢材质、耐高压、耐腐蚀、耐酸碱。
- ▶ 适用户外及有酸碱环境（不排气型）。
- ▶ 适用半导体工业。
- ▶ 流量大并有效快速排除水及微粒。
- ▶ 压力调整敏感精准。
- ▶ 轻量化，小型化，减少安装空间。
- ▶ 耐高压
- ▶ For high pressure use; corrosion and chemical resistance.
- ▶ Good performance for outdoor facility.
- ▶ Suitable for semi-conductor industry.
- ▶ Large flow rate and effectively removes water and particle.
- ▶ Accurate and sensitive pressure setting.
- ▶ Light weight; compact size for space saving.
- ▶ High pressure resistant.


## 订购码 / Ordering Code

|                                                                                                                                         |   |     |   |    |   |   |
|-----------------------------------------------------------------------------------------------------------------------------------------|---|-----|---|----|---|---|
| DR                                                                                                                                      | - | 200 | - | 02 | N | C |
| <div> <div>系列 / Series</div> <div>DR 过滤 + 调压 / Filter+Regulator</div> </div>                                                            |   |     |   |    |   |   |
| <div> <div>阀体尺寸 / Body size</div> <div>200</div> <div>400</div> <div>600</div> </div>                                                   |   |     |   |    |   |   |
| <div> <div>接管口径 / Joint pipe bore</div> <div>02 1/4</div> <div>03 3/8</div> <div>04 1/2</div> <div>06 3/4</div> <div>10 1"</div> </div> |   |     |   |    |   |   |
| <div> <div>配管口螺牙 / Thread</div> <div>空白 / Blank: G</div> <div>N: NPT</div> <div>R: RC</div> </div>                                      |   |     |   |    |   |   |
| <div> <div>工作温度 / Operating temperature</div> <div>空白 / Blank: -10~80℃</div> <div>C: -40℃</div> </div>                                  |   |     |   |    |   |   |


## 规格表 / Specifications

|                                     |                                                                                       |
|-------------------------------------|---------------------------------------------------------------------------------------|
| 型号 / Model                          | DR-200/400/600                                                                        |
| 配管尺寸 / Port size                    | 1/4 3/8 1/2 3/4 1"                                                                    |
| 使用流体 / Fluid                        | 压缩空气 / Compressed air                                                                 |
| 调压结构 / Regulator construction       | 活塞式 / Piston                                                                          |
| 本体材质 / Body material                | 不锈钢 SUS316 / Stainless Steel SUS316                                                   |
| 压力表材质 / Pressure gauge material     | 外壳不锈钢 SUS304、牙口不锈钢 SUS316、/Case:Stainless steel SUS304, Thread:Stainless steel SUS316 |
| 操作压力 / Operating pressure range     | 0~20kgf/cm <sup>2</sup>                                                               |
| 最大进气压 / Proof pressure              | 30kgf/cm <sup>2</sup>                                                                 |
| 最大流量 / Max. flow rate / 1/min (ANR) | 1850 1/min                                                                            |
| 环境温度 / Ambient temperature          | -10℃~70℃                                                                              |
| 净重 / Net weight                     | 1200g                                                                                 |
| 附属配件 / Accessories (Option)         | 压力表 (0~10kg)、塞头、固定架组 / Pressure gauge, Mounting bracket, Plug, Screw x 2              |
| 选配 / Match                          | 压力表 (0~20kg)                                                                          |

DR-200-02

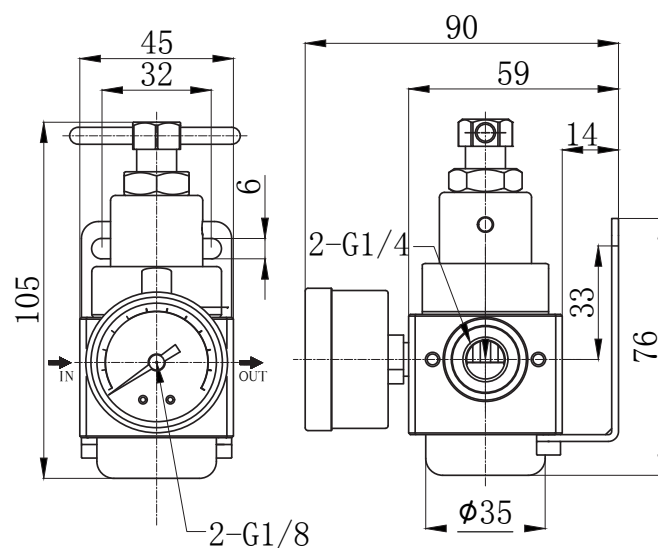

DR-400-04,03

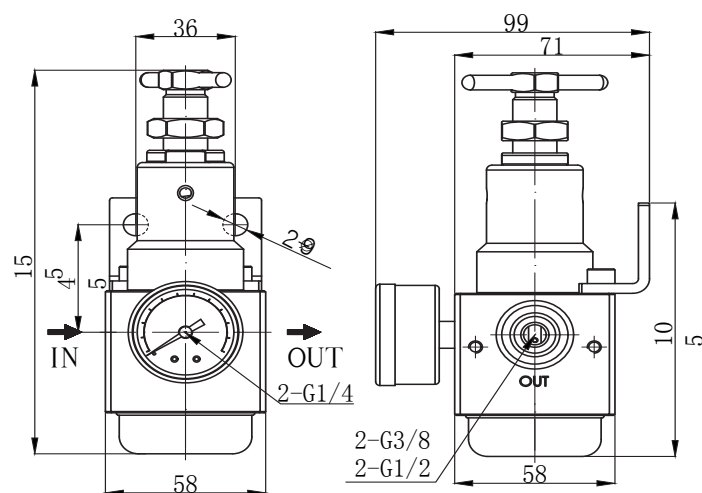

DR-600-10,06

