


AFC、BFC系列二点组合（二联件）

AFC,BFC Series Two-point Combination (FR.L Combination)

DGE



订购码 Ordering Code

BFC

型号 Model

AFC: 小型 Small Size
BFC: 中型 Middle Size

3000

接管口径 Port Size

1500: G1/8" 2000: G1/4"
3000: G3/8" 4000: G1/2"

D

排水方式 Drian Type


空白: 差压排水
D: 自动排水
Blank: Differential Drain
D: Automatic Drain

规格 Specification

型号 Model		AFC1500	AFC2000	BFC2000	BFC3000	BFC4000
使用流体/Operating Fluid		空气 Air				
接管口径/Port Size		G1/8"	G1/4"	G1/4"	G3/8"	G1/2"
滤心粗度/Filtering Element Roughness		40 μ				
调节压力范围/Range of Adjustable Pressure		0.05~0.85MPa				
最大可调压力/Max. Adjustable Pressure		0.95MPa				
保证耐压力/Ensured Pressure Resistance		1.5MPa				
使用温度范围/Operating Temp. Range		5~60℃				
滤水杯容量/Capacity of Filter Cup		15 cc		60 cc		
给油杯容量/Capacity of Oil Feed Cup		25 cc		90 cc		
建议润滑油/Suggested Lube		ISO VG 32 或 同级用油		ISO VG 32 or Same Grade Oil		
重量/Weight		0.5 KG		0.7 KG		
材质 Material	本体/Body	铝合金压铸成型		Aluminum Die-casting Forming		
	容杯/Container Cup	PE				
	保护杯罩/Protective Cup Cover	—		铁 Iron		
构成元件 Composing Elements	过滤调压阀/Filter & Regulator	AFR1500	AFR2000	BFR2000	BFR3000	BFR4000
	油雾器/Lubricator	AL1500	AL2000	BL2000	BL3000	BL4000

外形尺寸 Overall Dimension

AFC

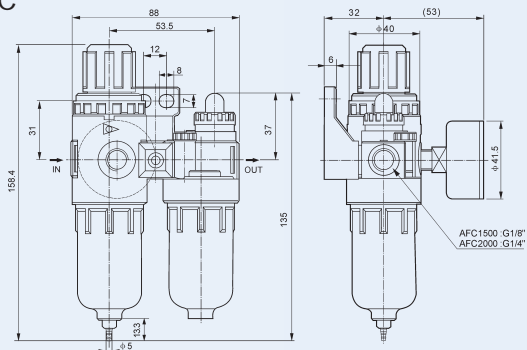

BFC

